


LOGO STAMPING MACHINE



Details

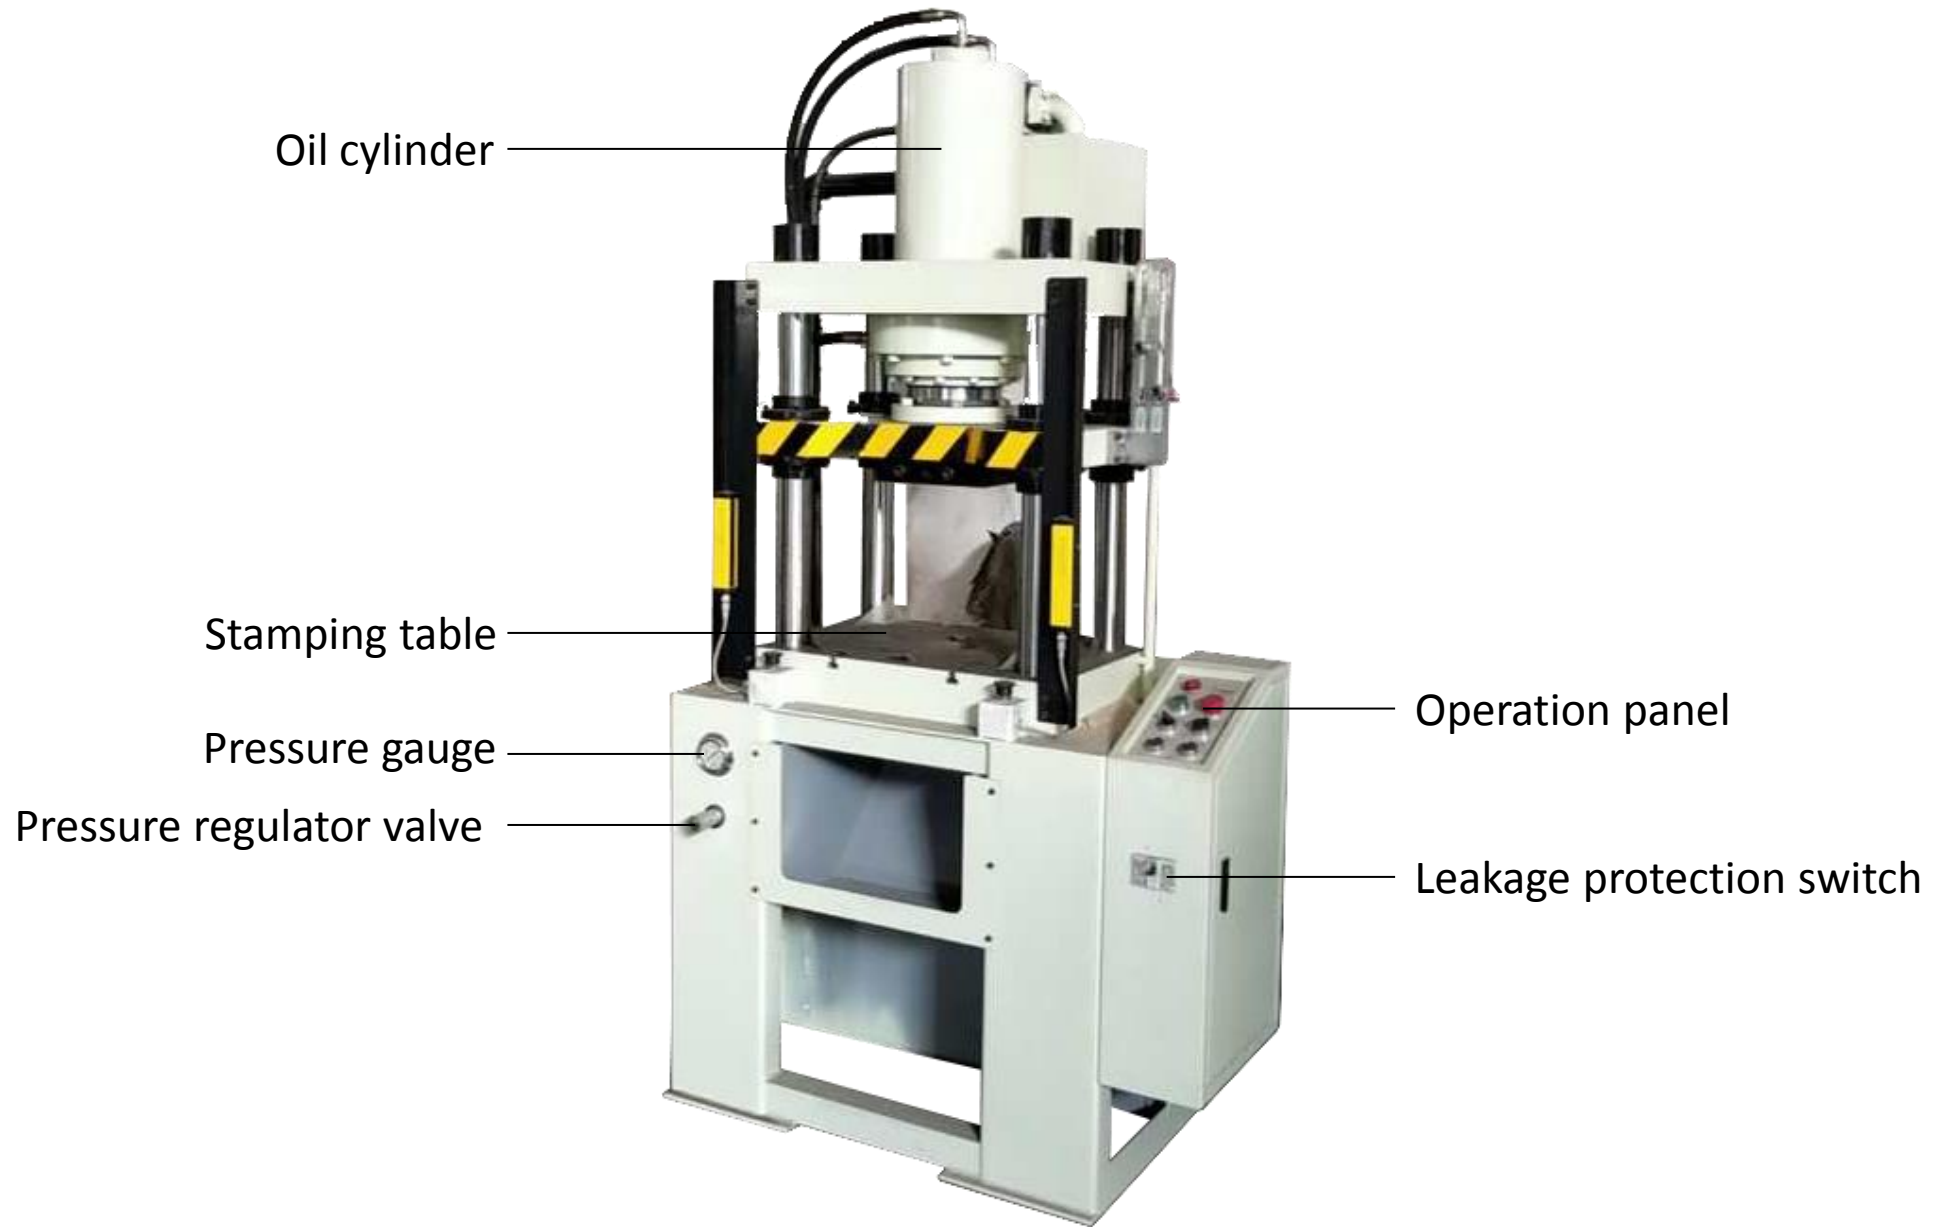

Parameter

Model number	CDO-LS10	CDO-LS20	CDO-LS30	CDO-LS40	CDO-LS50
Nominal/ton	2.5-10	5-20	8-30	10-40	15-50
Max stroke/mm	100-200	100-250	100-250	300	300
Opening height/mm	300	350	350	400	400
Descending speed/mm	88	68	48	38	38
Rising speed/mm	88	68	48	38	38
Worktable area/mm	450*350	500*400	500*400	600*500	600*500
Table height from the ground/mm	850	850	850	850	850
Voltage/V	380	380	380	380	380
Motor power/kw	3.75	3.75	3.75	5.5	5.5
Weight/kg	580	660	800	980	1200

Feature

- 1: Adopt four-column hydraulic structure, 3-sided protective door plate, four-axis precision linear self-lubricating guide sleeve control, high vertical accuracy.
- 2: Simple operation, ordinary workers can skillfully operate this hydraulic logo stamping machine
- 3: CDOCAST Hydraulic stamping machine Imported the most famous brand components, which have low noise during the operation, strong stability and high safety performance.
- 4: Rational design, our hydraulic stamping machine is relatively stronger and more solid than other suppliers.

Application

