


LOGO STAMPING MACHINE



Details

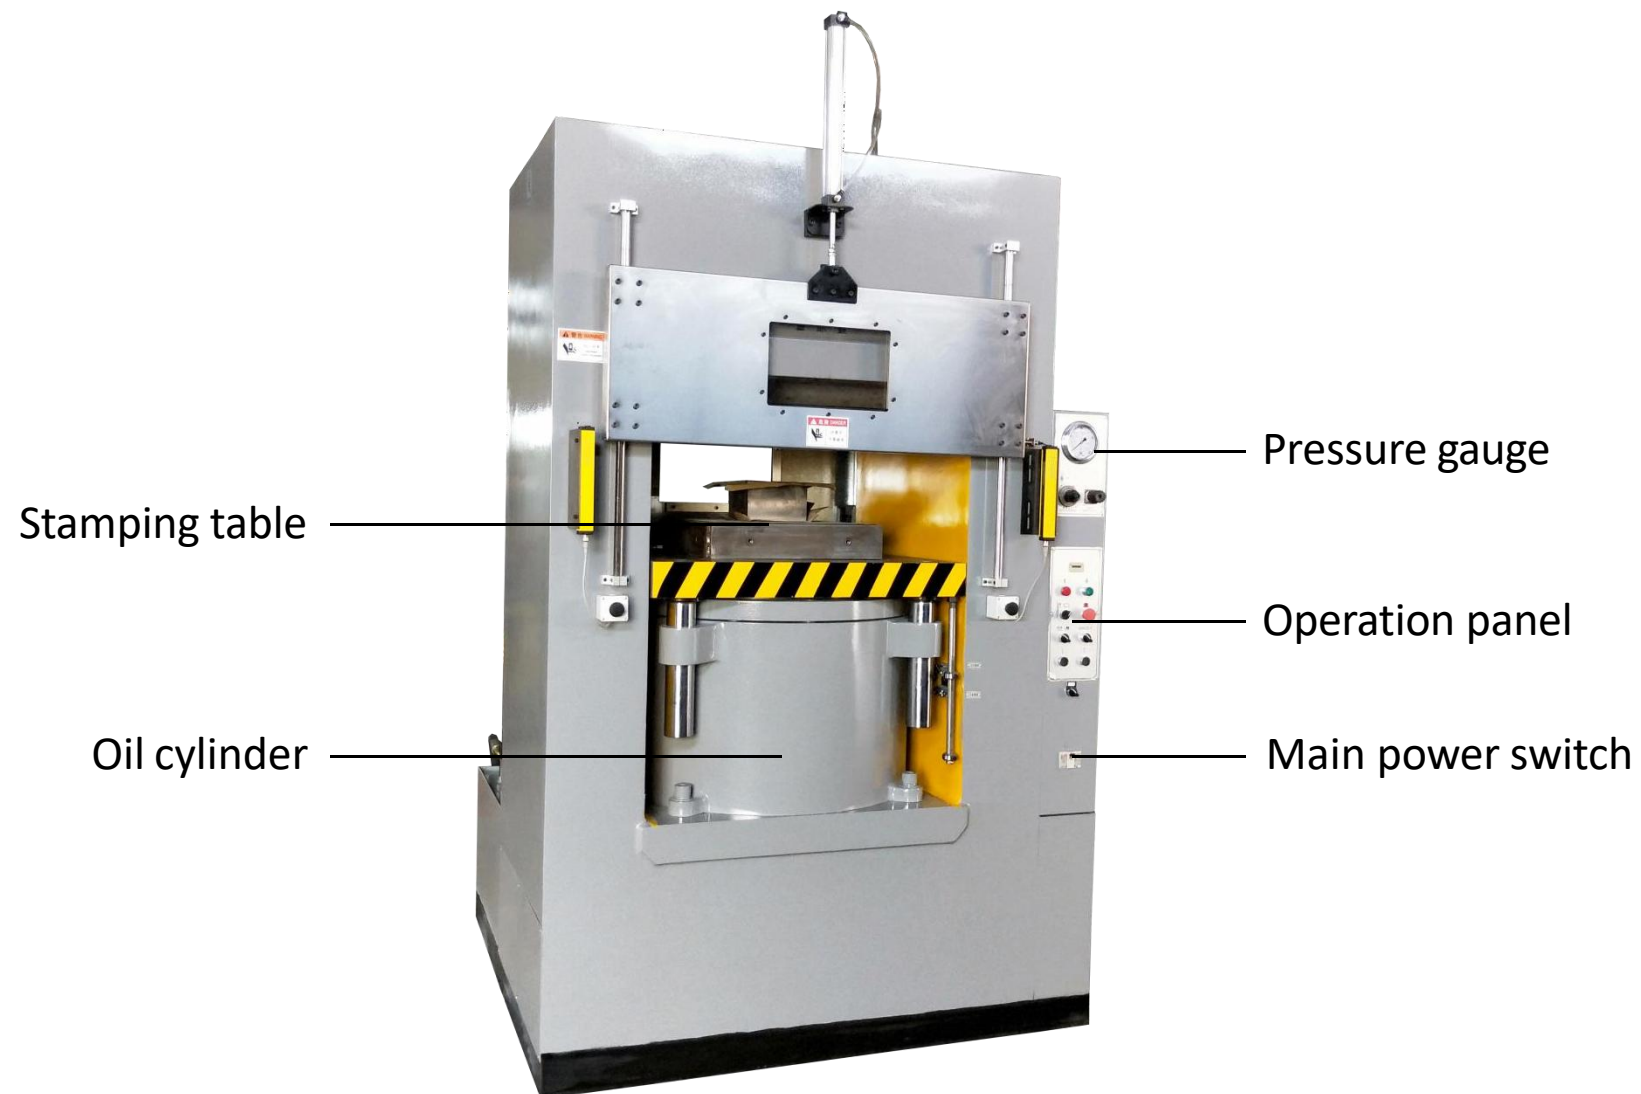

Operation panel



System pressure Work pressure



Work control panel

Operation panel



With servo motor



Siemens PLC panel

Parameter

Model		Unit	CDO-200E1	CDO-300E1	CDO-500E1	CDO-1000E1
Rated capacity		Ton	200	300	500	1000
Max.System pressure		Mpa	22	24	25	25
Stroke of movable working table		mm	150	150	150	150
Opening height		mm	380	380	450	500
Height of working platform from ground		mm	1050	1080	1185	1365
Upward speed of movabale working table		mm/s	90	80	80	80
Returning speed of movabale working table		mm/s	105	90	80	80
Movable working table size	L-R between column	mm/s	520	580	710	900
	F-B Rim	mm/s	500	540	640	880
Overall dimension	L-R	mm	1130	1200	1440	1640
	F-B	mm	1040	1165	1370	1860
	H	mm	1840	1895	2080	2500
Motor power		KW	5.5	7.5	15	22
Weight (Approx.)		Kgs	2400	3300	5500	9800

Feature

- 1.The frame structure is designed by mechanical analysis, welded with high quality steel material, with good overall rigidity and high compressive strength.
- 2.Quickly lowering the cylinder to set up the upper pressure type hydraulic cylinder, with high flat temperature.
- 3.Pressure, stroke, holding pressure, etc. can be adjusted according to the requirements of the pressing process.
4. Infrared protection, safer operation.

Application



www.cdocast.com



CDOCAST MACHINERY CO., LTD.

Skype: mandymeina
Tel: +86-15168765707

Email: sales@cdocast.com
Website: www.cdocast.com