

MANUAL TILTING METAL MELTING FURNACE







Details



Details

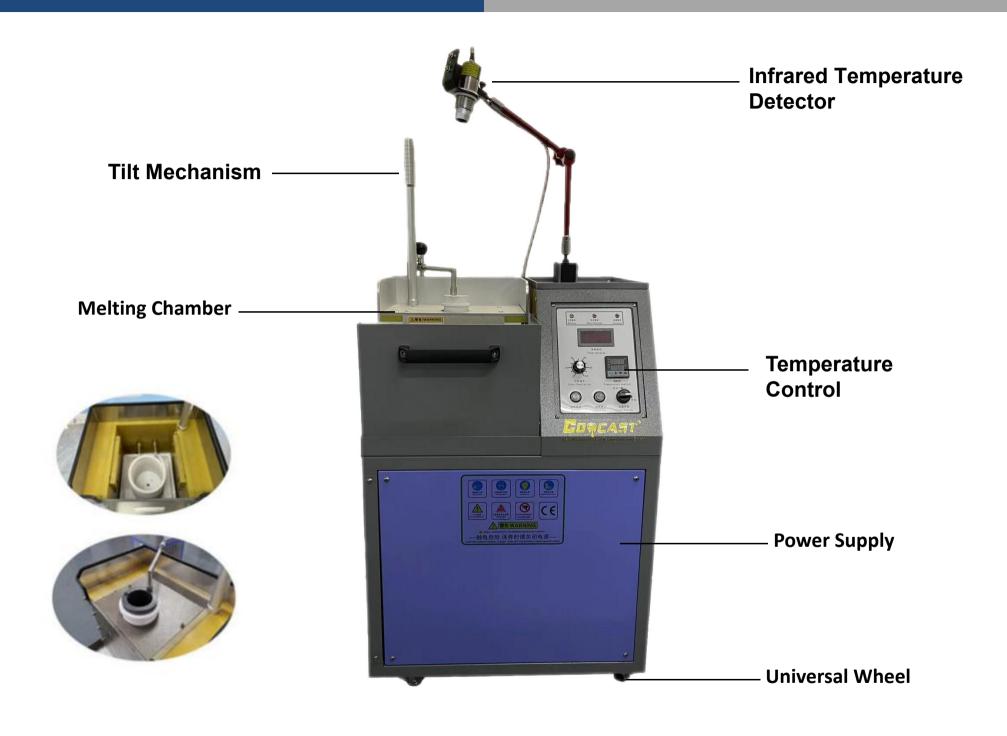

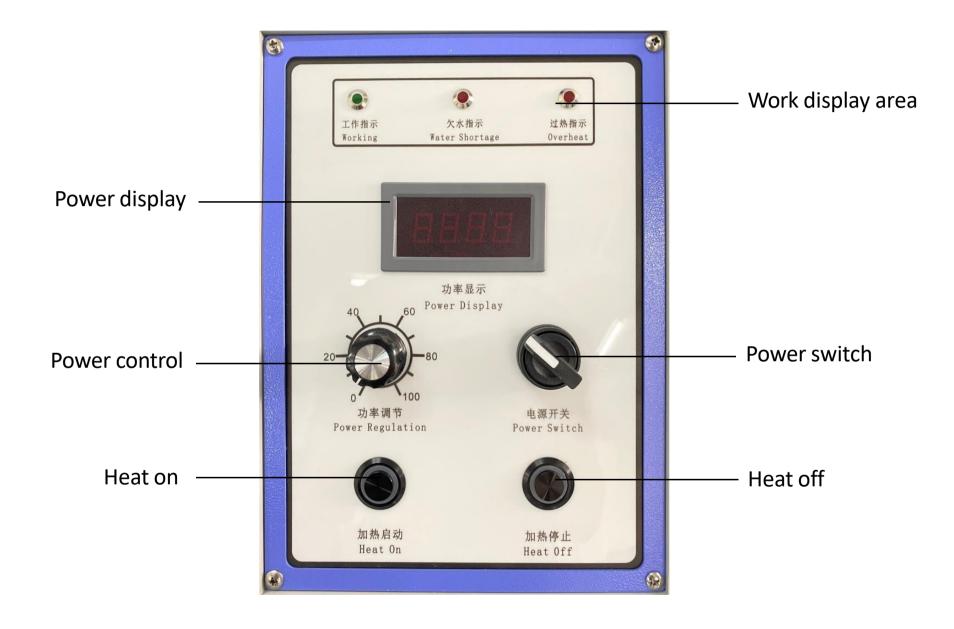

Parameter

Model number	CDO-MT26	CDO-MT27	CDO-MT28	CDO-MT29
Applicable metal	Gold, Silver, Copper, Brass, Bronze, and their alloys			
Voltage	3P, 220V, 50/60Hz	3P, 380 V, 50/60Hz	3P, 380 V, 50/60Hz	3P, 380 V, 50/60Hz
Power	15 kw (adjustable)	20 kw (adjustable)	25 kw (adjustable)	30 kw (adjustable)
Weight	72 kg	75 kg	130 kg	130 kg
Max capacity	Gold: 4 kg Silver:2kg	Gold: 6 kg Silver:3kg	Gold: 8 kg Silver:4kg	Gold: 10 kg Silver:5kg
Melting time	2-5 min	3-6 min	5-10 min	6-12 min
Dimension (LWH)	620*500*980mm	620*500*980mm	730*630*980mm	730*630*980mm
Max temperature	1800 °C	1800 °C	1800 °C	1800 °C
Temperature control k-type	Optional	Optional	Optional	Optional
Water pump	Equipped	Equipped	Equipped	Equipped

Features

1: CDOCAST gold smelting machine has the ability of electromagnetic stirring, which can make the metal melting more homogeneous and evenly.

2: Able to work continuously for 24 hours, greatly increasing productivity.


3: The design of the pouring system makes it easy for workers to operate, and can pour the molten liquid into the mold more precisely which can prevent the crucible from spilling the molten metal liquid n caused by the error operation of the crucible.

4: gold smelting machine is Configured with a variety of safety alarm system, if the occurrence of overcurrent, overpressure, water shortage and other conditions, the machine will stop running automatically, which can effectively protect the machine!

5: Thermocouple or infrared thermometer temperature control can be installed to monitor the temperature of the entire melting process.

6: Built-in water pump design, just need to connect the water and electricity can be used directly.

Application

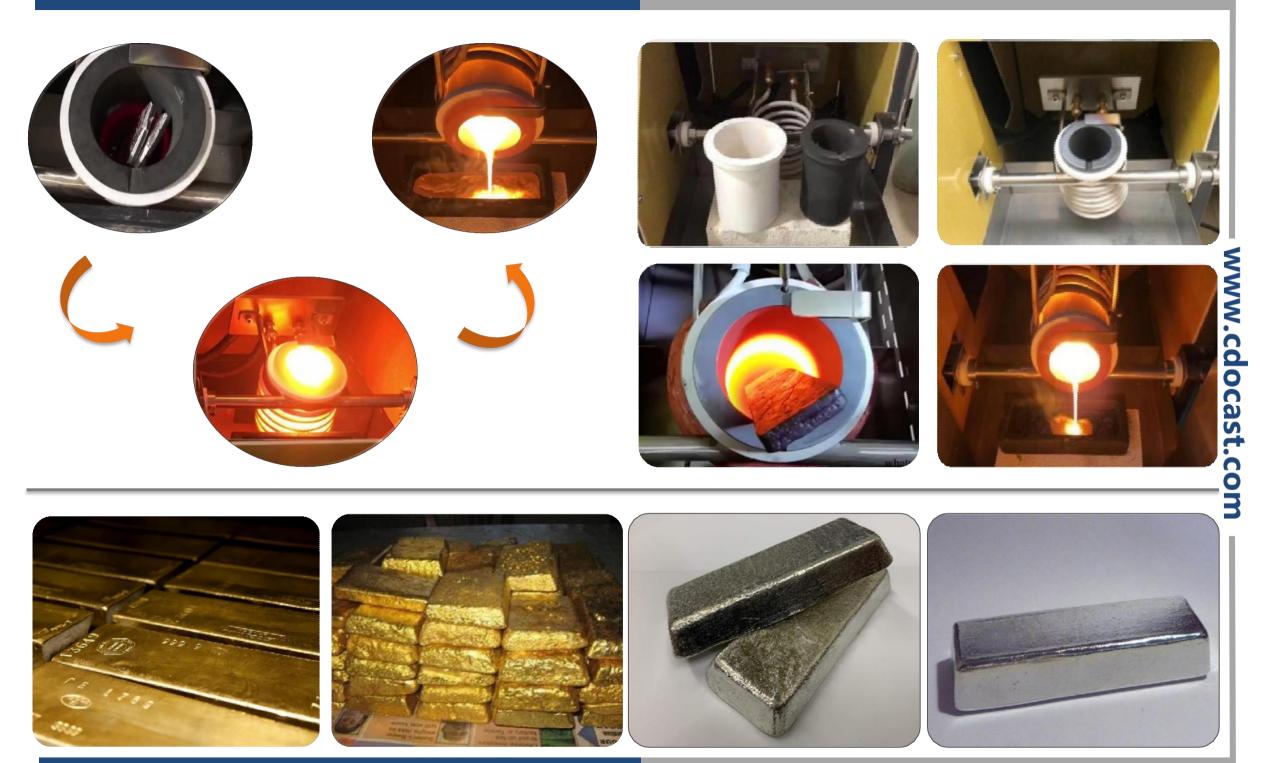

CDOCAST MACHINERY CO., LTD.

 Skype:
 mandymeina
 Em

 Tel:
 +86-15168765707
 We

Email: sales@cdocast.com Website: www.cdocast.com