


Hydraulic Blanking Punch Machine




Process

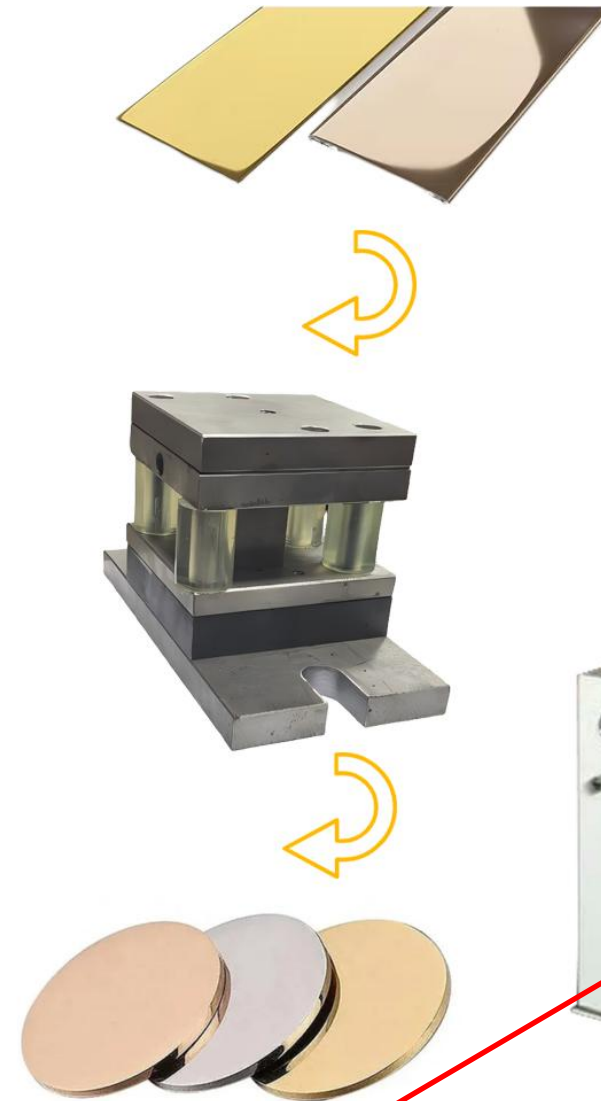


Front discharge

Machine Drawing

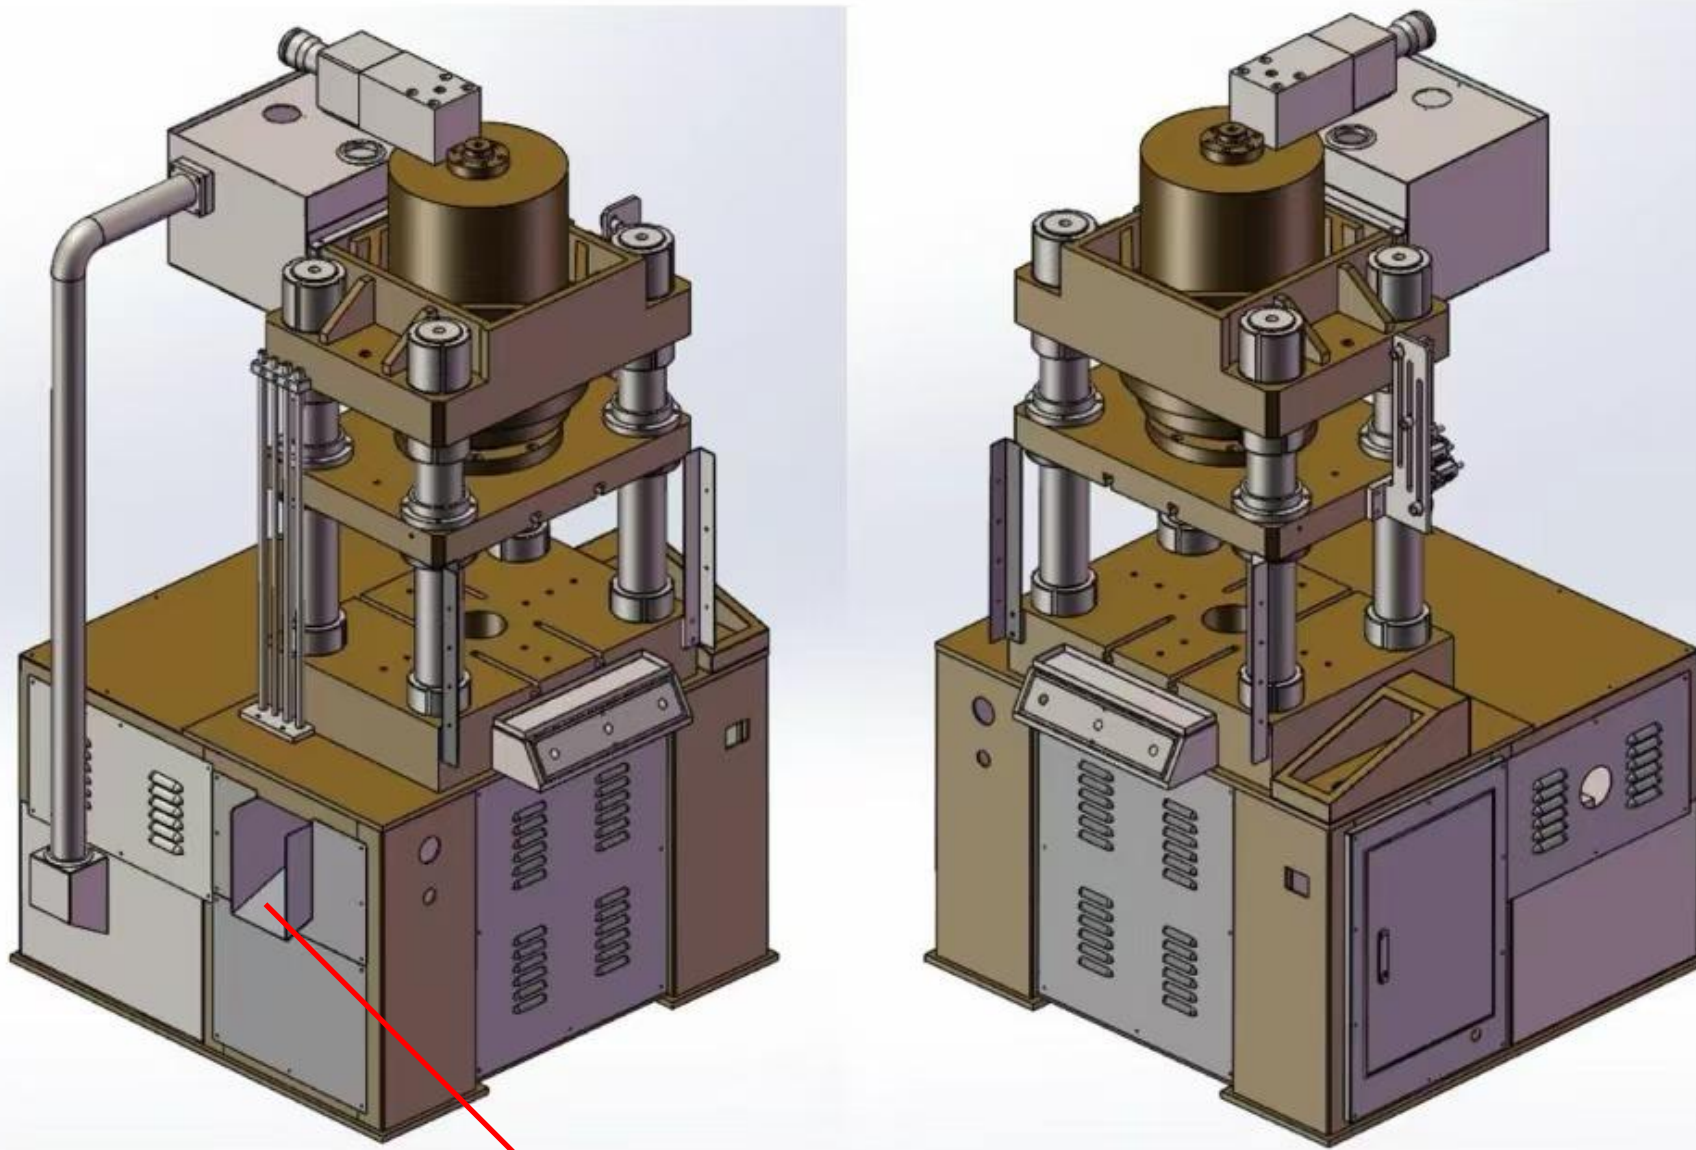

Side discharge

Details

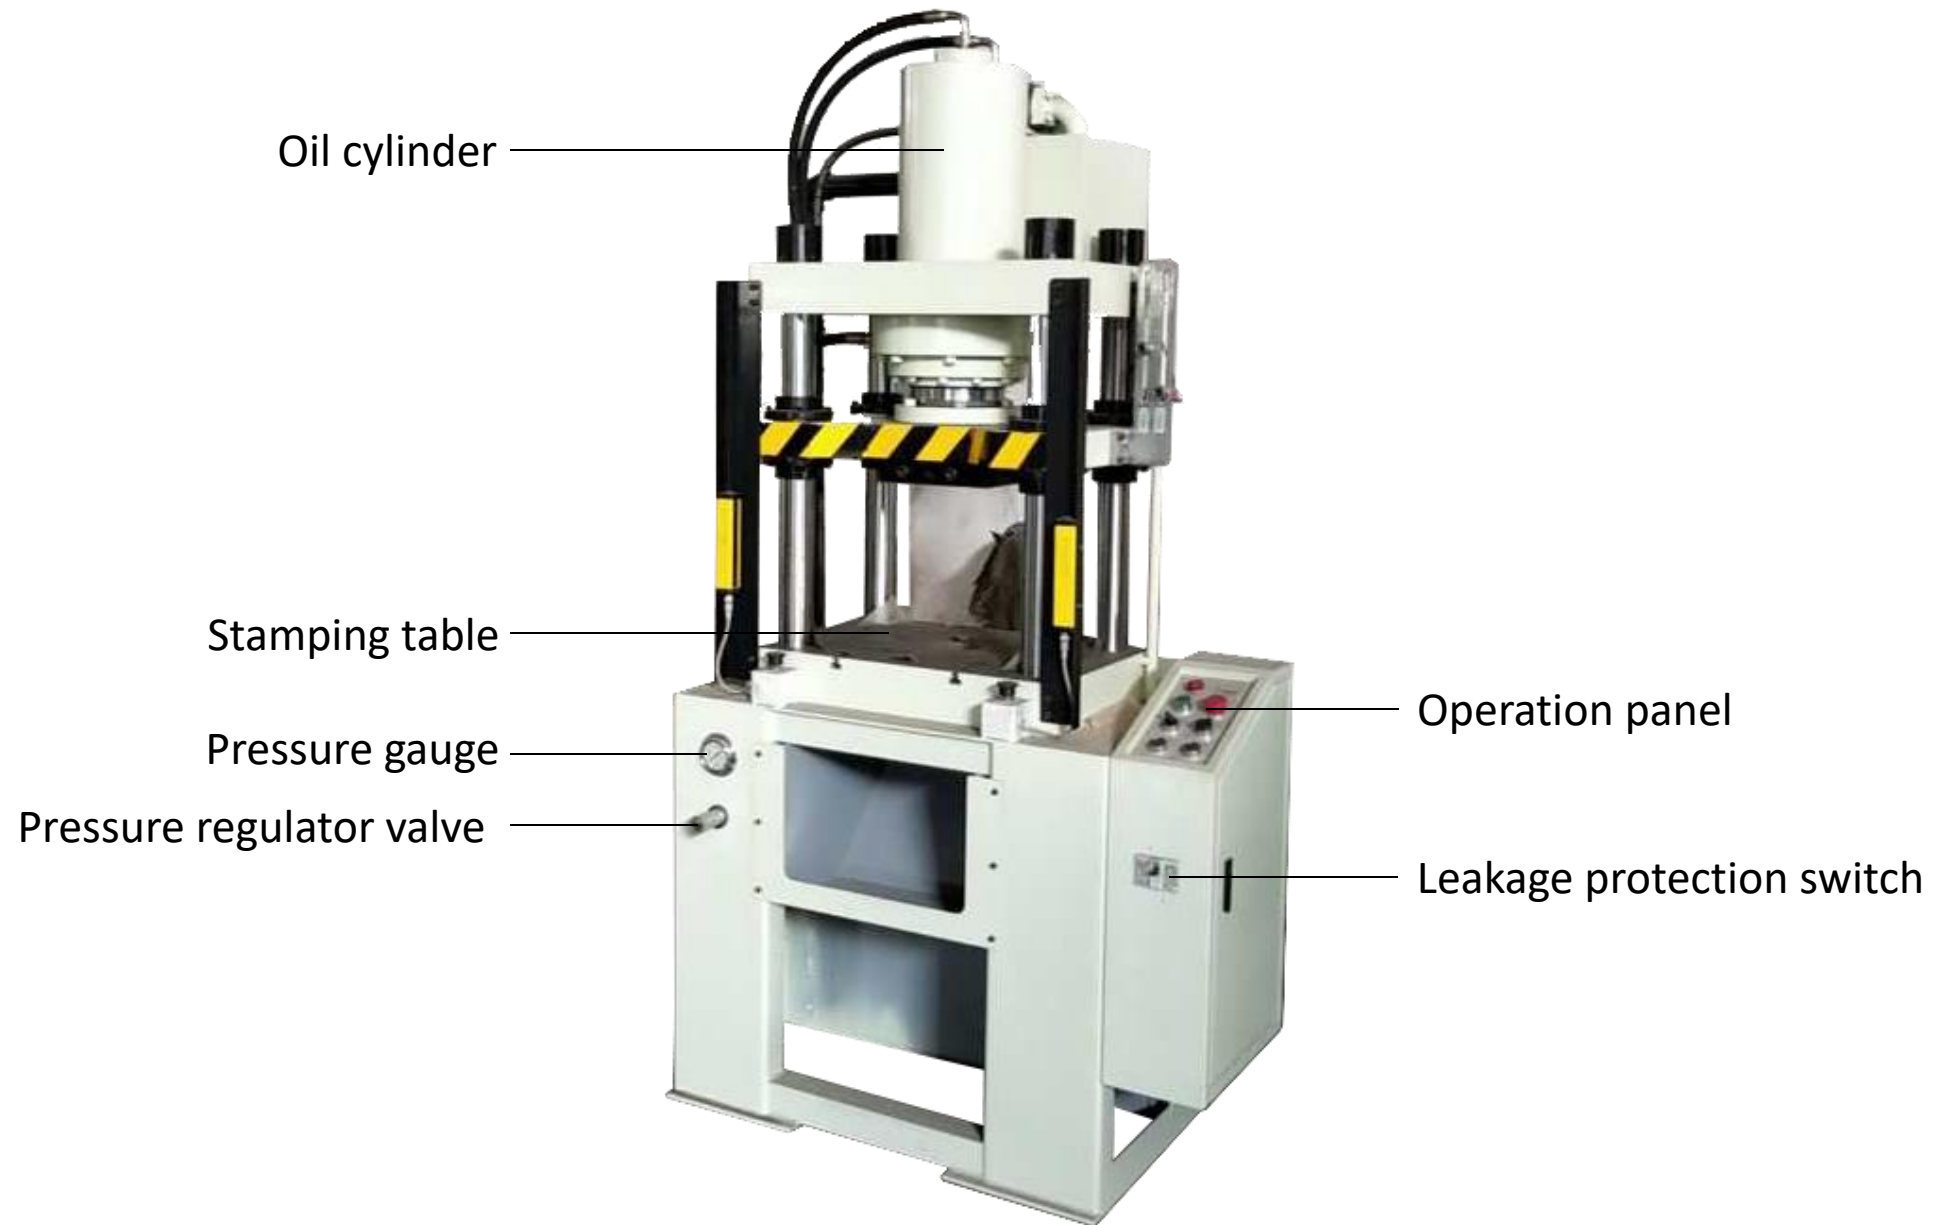

Parameter					
Model number	CDO-HP50	CDO-HP60	CDO-HP100	CDO-HP180	CDO-HP200
Nominal/ton	53	60	100	180	200
Max System Pressure/Mpa	20	22	20	24	22
Max stroke/mm	200	200	250	250	250
Height of working platform from ground/mm	900	880	900	900	850
Opening height/mm	--	380	--	--	--
Middle blanking hole diameter of table/mm	100	--	120	100	150
Moving beam top die shank hole diameter/mm	40	40	40	40	40
The maximum distance from the moving beam to the workbench/mm	320	--	380	400	500
Descending speed/mm	180	190	200	170	180
Feeding Speed/mm	--	10	--	10	--
Rising speed/mm	200	190	220	160	150
Worktable area/mm	450*450	450*450	550*550	520*580	520*600
Overall Dimension(L*W*H)/mm	1080*940*2100	1080*950*2100	1200*1050*2200	1400*1100*2550	1400*1300*2500
Motor power/kw	5.5	5.5	5.5	7.5	11
Weight/kg	1600	1600	2500	--	4800

Feature

- 1: Adopt four-column hydraulic structure, 3-sided protective door plate, four-axis precision linear self-lubricating guide sleeve control, high vertical accuracy.
- 2: Simple operation, ordinary workers can skillfully operate this hydraulic logo stamping machine
- 3: CDOCAST Hydraulic stamping machine Imported the most famous brand components, which have low noise during the operation, strong stability and high safety performance.
- 4: Rational design, our hydraulic stamping machine is relatively stronger and more solid than other suppliers.

Application



CDOCAST MACHINERY CO., LTD.

Skype: mandymeina Email: sales@cdocast.com
Tel: +86-15168765707 Website: www.cdocast.com